

1.1 Product Page

The **KNX-Drossel-DR16** is used to decouple the EIB / KNX bus line from the power supply and is designed for DIN rail mounting.

It can be connected KNX devices with a total current of 1600mA.

With the reset button can be disconnected the bus from the power supply. The reset time is approximately 10 seconds. After reset, the KNX devices start working again.

KNX/EIB Choke

Operating and Display Elements: Reset Button
Reset LED


Input: EIB 2-pol Terminal (white / yellow)
Output: EIB 2-pol Terminal (red / black)

Nominal Voltage: 30VDC
Nominal Current: 1600mA

Operating Temperature: -25 .. +55 °C
Storage Temperature: -25 .. +85 °C

Housing: DIN rail mounting 2TE

Protection Class: IP20

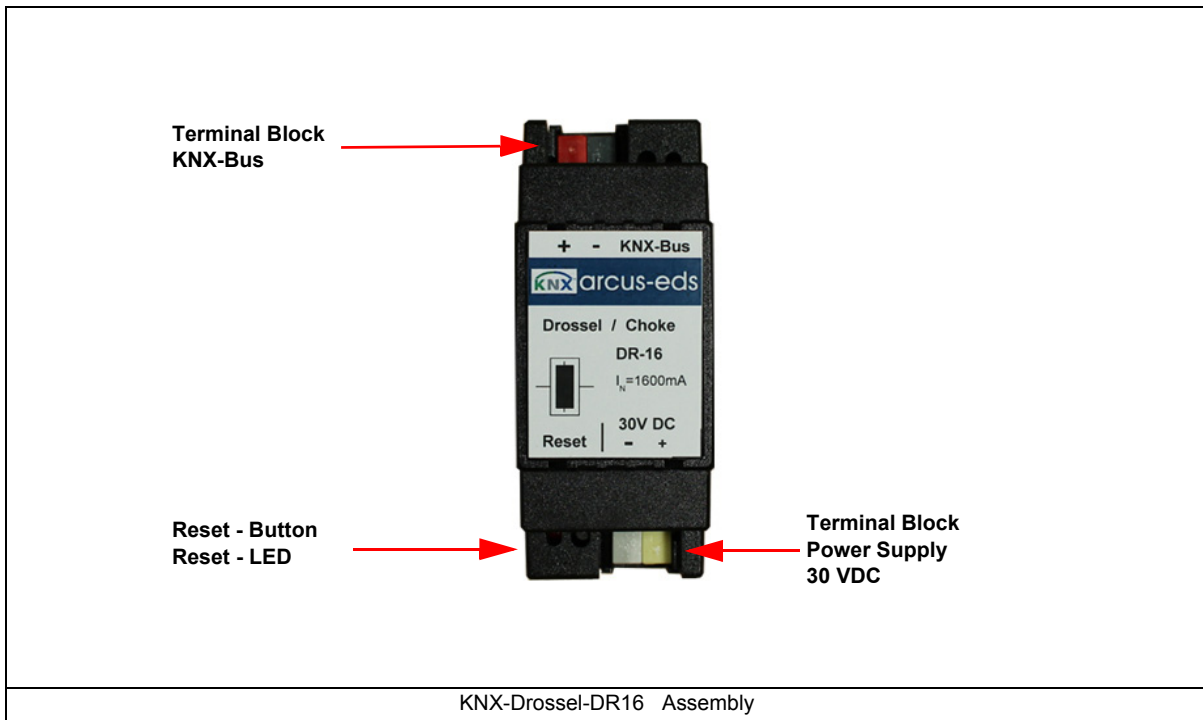

Imprint

Editor: Arcus-EDS GmbH, Rigaer Str. 88, 10247 Berlin

Responsible for the contents: Hjalmar Hevers, Reinhard Pegelow

Reprinting in part or in whole is only permitted with the prior permission of Arcus-EDS GmbH.

All information is supplied without liability. Technical specifications and prices can be subject to change.

Liability

The choice of the devices and the assessment of their suitability for a specified purpose lie solely in the responsibility of the buyer. Arcus-EDS does not take any liability or warranty for their suitability. Product specifications in catalogues and data sheets do not represent the assurance of certain properties, but derive from experience values and measurements. A liability of Arcus-EDS for damages caused by incorrect operation/projecting or malfunction of devices is excluded. The operator/project developer has to make sure that incorrect operation, planning errors and malfunctions cannot cause subsequent damages.

Safety Regulations

Attention! Installation and mounting must be carried out by a qualified electrician.

The buyer/operator of the facility has to make sure that all relevant safety regulations, issued by VDE, TÜV and the responsible energy suppliers are respected. There is no warranty for defects and damages caused by improper use of the devices or by non-compliance with the operating manuals.

Warranty

We take over guarantees as required by law.

Please contact us if malfunctions occur. In this case, please send the device including a description of the error to the company's address named below.

Manufacturer



Registered Trademarks



The CE trademark is a curb market sign that exclusively directs to authorities and does not include any assurance of product properties.



Registered trademark of the Konnex Association.