

SIQURA

EX/SA-FTK01


DIN-rail Fiber Optic Cable Termination Kit for SM or MM fiber

DESCRIPTION

DIN-rail kit to terminate Fiber Optic single-mode or multi-mode cable in the EX-JB01 junction box.

FEATURES

- _____ DIN-rail mount Fiber Optic Splice box
- _____ High-impact plastic (ABS)
- _____ 4x semi-tight buffered pigtails
- _____ For both LC and SC termination
- _____ Robust and easy to install

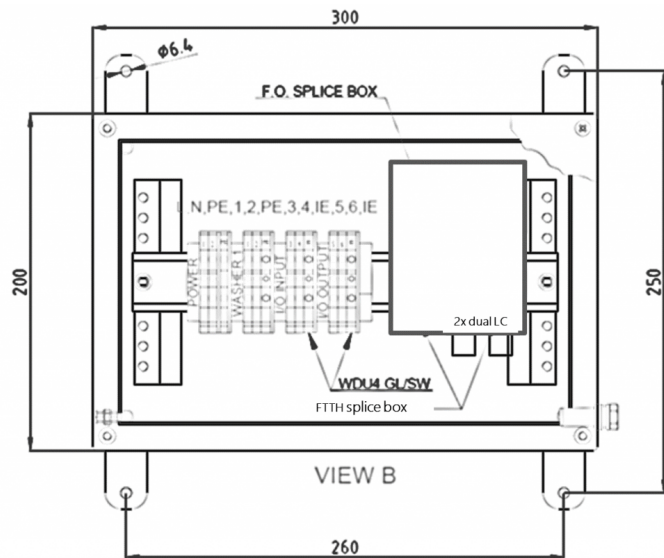

EX-FTK01-2SM

Optical power rating	Shall comply Class 1 optical radiation
Body material	ABS
Number of ports	1 or 2.
Fibre type	single mode OS2
Pig tails	2x single mode 0.9 mm OS2 semi-tight buffered with LC connector 2x single mode 0.9 mm OS2 semi-tight buffered with SC connector
Adapter	1x duplex LC/LC adapter 2x SC/SC adapter
Mounting	DIN-rail
Size (h x w x d)	100 x 80 x 23
Weight	0.565 kg


EX-FTK01-2MM


Optical power rating	Shall comply Class 1 optical radiation
Body material	ABS
Number of ports	1 or 2.
Fibre type	multimode OM1
Pig tails	4x multimode 0.9 mm OM1 semi-tight buffered with SC connector
Adapter	2x SC/SC adapter
Mounting	DIN-rail
Size (h x w x d)	100 x 80 x 23
Weight	0.565 kg

Ordering information

EX-JB01	316L Ex e termination box for Ex cameras
EX/SA-FTK01-2SM	DIN-rail Fiber Optic Cable Termination Kit for SM (Dual SC and LC)
EX/SA-FTK01-2MM	DIN-rail Fiber Optic Cable Termination Kit for MM 2x SC

TERMINATION EXAMPLE BASED ON FIBER

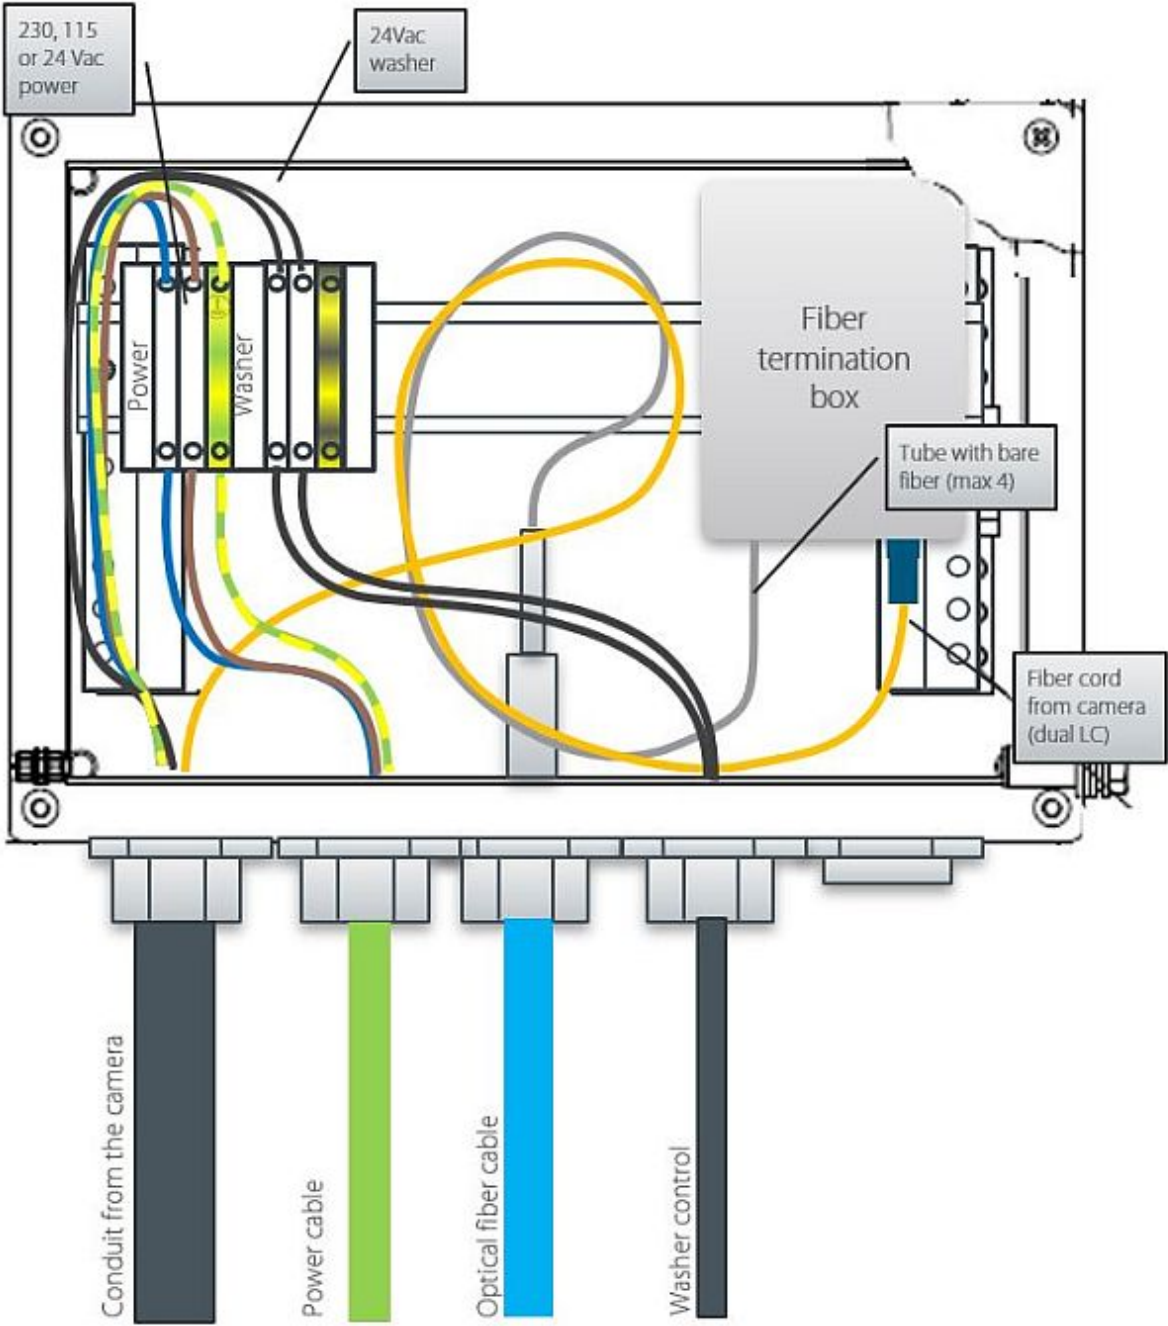

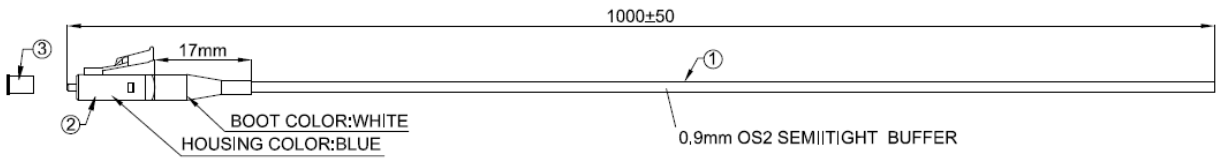

LC/UPC SM CONNECTOR

RELATED



Siqura EX-JB01

316L Ex e termination box for EX cameras
