

DF400


Modulo processore UltraLink con 8 ingressi/8 uscite relè. Montaggio guida DIN

Ultralink I/O modules are used to receive and/or transmit alarm information as part of an integrated security system.

Applications include:

- Converting FlexZone sensor alarm collected over the Silver Network to relays or open-collector outputs for input to a 3rd party Security Management System.
- Collecting auxiliary sensor alarms with dry-contact inputs for display with a Management system.

The Ultralink I/O module connects to the Silver Network via a communication card. Up to 8 Ultralink expansion modules can be attached to one UltraLink module (DF432). Configuring the mods of operation of the relay outputs, open-collector outputs and dry-contact inputs is done with the UCM software. The UCM can be connected to the Ultralink modules either by a direct USB connector to the I/O processor or by an IP connection via the Network manager Software.

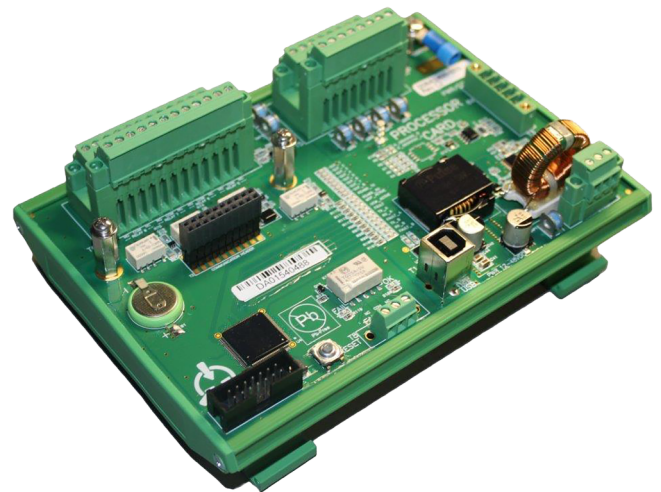

Dettagli

- Hosts one network communication card
- Expansion port for up to 8 Ultralink expansion modules
- USB configuration port
- 8 relay outputs
- 8 dry-contact inputs
- Supplies power to connected modules
- Modular system comprised of processor module, relay module, open-collector output module & dry-contact input module

DF400

Modulo processore UltraLink con 8 ingressi/8 uscite relè. Montaggio guida DIN

Specifiche tecniche

Generale

Category	FlexZone
Product type	Unità di controllo FlexZone

Elettrico

Operating voltage	12 to 48 VDC
-------------------	--------------

Fisico

Dimensioni fisiche	160 x 118 mm
--------------------	--------------

Ambientale

Relative humidity	0 to 95%, non condensing
Ambiente	Interno



In quanto azienda in continua innovazione, Carrier Fire & Security si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 5 May 2023 - 9:37