



Elettro catenaccio in acciaio INOX – 24 Vdc
Electro stainless steel deadbolt – 24 Vdc
GLEB02




Caratteristiche:

- Alimentazione: 24 Vdc
- Materiale: Acciaio INOX AISI 304
- Pistone:
 - Prolungamento: 29,50 mm
 - Diametro: 17,80 mm
- Caratteristiche del pistone: fail secure – il pistone si sblocca quando viene applicata l'alimentazione
- Forza di tenuta del pistone: 2000 Kg
- Uscita relè: NC/NO/COM
- Corrente d'esercizio: 3,00 A
- Corrente in standby: 0,35 A
- Installazione:
 - Verticale con pistone verso il basso
 - Orizzontale
- Grado di protezione: IP 55
- Peso: 1,80 Kg
- Esempi di installazione:
 - Portoni d'acciaio
 - Porte pesanti


Features:

- Power supply: 24 Vdc
- Material: AISI 304 Stainless steel
- Bolt:
 - Prolongation: 29,50 mm
 - Diameter: 17,80 mm
- Bolt features: fail secure – the bolt unlocks when the power is applied
- Bolt holding force: 2000 Kg
- Relay output: NC/NO/COM
- Operating current: 5,00 A
- Standby current: 0,60 A
- Installation:
 - Vertical installation with the piston facing downwards
 - Horizontal installation
- IP rate protection: IP 55
- Weight: 1,80 Kg
- Examples of installation:
 - Steel gates
 - Heavy doors

Dimensioni:

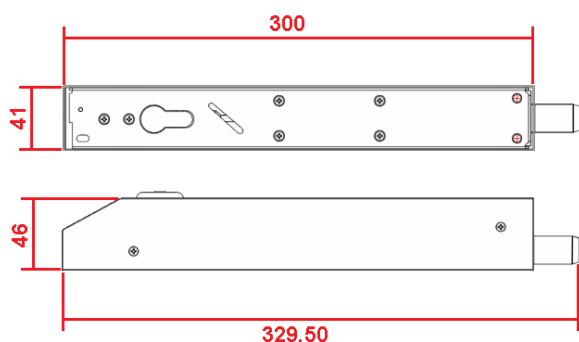


Dimensioni:

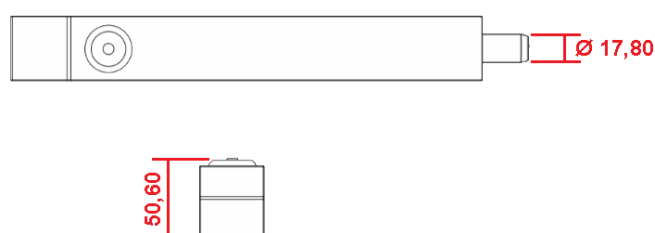



Collegamento:

Connection:

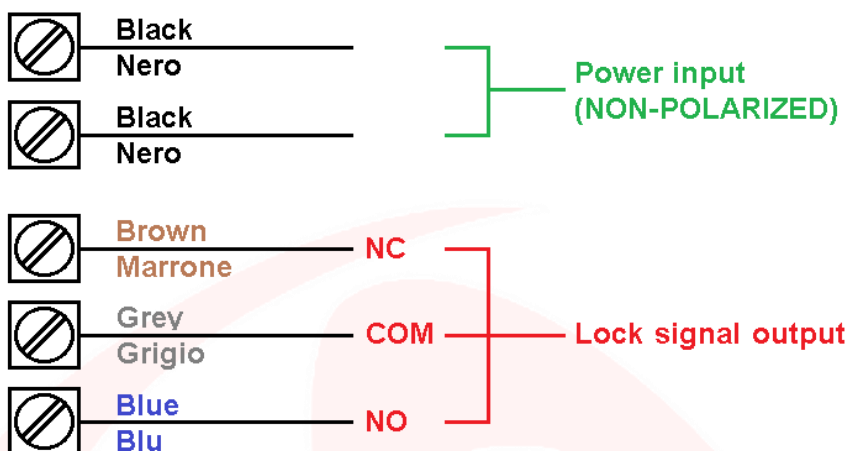

Installazione:

- Installazione verticale con pistone verso il basso
- Installazione orizzontale

Installation:

- Vertical installation with the piston facing downwards
- Horizontal installation

