

5501-M

Interfaccia per rivelatori di liquidi.

Moisture processor

The 5500 moisture detection series is designed to respond to the presence of water and other non-flammable conductive liquids and to be connected in the closed loop of an alarm system. Two sensors are available; 5505 under carpet sensor and 5515 surface mount sensor. Any combination of up to 4 sensors can be used with the 5501 moisture processor.

The 5501 moisture processor can be used with any closed loop control, dialer or wireless transmitter input circuit. The processor comes with internal lithium batteries that have an anticipated life time of 10 to 15 years. The processor offers flexibility in mounting with no need for an external power source and minimal wiring required.



Dettagli

- Detects presence of water and non-flammable conductive liquids
- No external power required
- Sensor circuit totally isolated by optical couplings
- Up to 4 sensors per 5501 moisture processor

5501-M

Interfaccia per rivelatori di liquidi.

Specifiche tecniche

Generale

Sensor type	Sensore di allagamento
Conessioni	Screw terminals
Alarm contact	NC, aperto finchè umidità presente
Alarm delay	10 s

Cablato / senza fili


Cablato / senza fili	Cablato
----------------------	---------

Elettrico

Batteries	Lithium battery
Battery lifetime	Da 10 a 15 anni

Fisico

Physical dimensions	116 x 70 x 35 mm (L x W x H)
Colore	Marrone

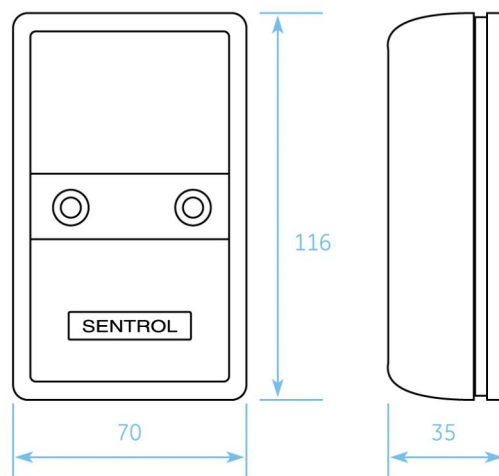

In quanto azienda in continua innovazione, Carrier Fire & Security si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 5 May 2023 - 9:33