

DEU1008 Disk Enclosure

Overview

DEU1008, with high performance, high reliability, high density, high scalability, is anaffordable high-leveldisk enclosure developed especially for video surveillance.



DEU1008

Features

High density

The innovative enclosure with 530.4mm depth and 2U height that holds up to 8 disks, is space-saving and applicable to the standard rack-mounted scenarios.

Power protection

Disk poweredonsequentially during system startup, protection from impulse current.

Multistagefan speed and energy saving

Fans with multistage speed are configured in the hot-swappable frame in redundancy mode. System power consumption can be balanced intelligently with heat dissipation calculation to ensure low power consumption and stable operation of the system.




Specifications

	DEU1008	
Storage		
HDD	8 SATA Interfaces	
Disk Capacity	up to 8TB for each disk	
External Interface		
Back-end Expansion Interface	1 Mini SAS	
General		
Power Supply	100 ~ 240V	
Consumption (with HDD)	≤ 100W	
Working Environment	-10 °C~ 55 °C 5%~95% RH (non-condensing)	
Weight(Without HDD)	< 8 kg(17.6lb)	
Dimensions (W×D×H)	442.0 × 530.4 × 86.1mm (17.4" × 20.88" × 3.39")	



Dimensions

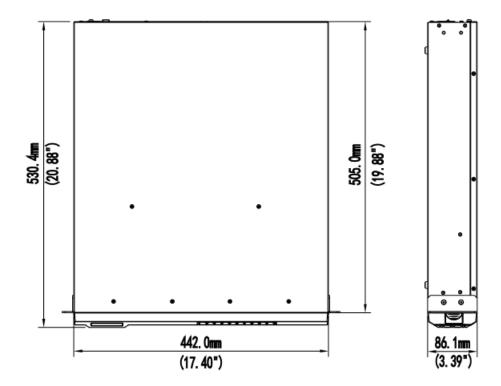



Rear Panel



No.	Item	Description
0	Grounding terminal	Equipment grounding
0	Power interface	AC power, 100 V-240 V AC
8	Power switch	Turn on/off device when connected to power
4	Mini-SAS interface	For connection to the host

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseas business@uniview.com; global support@uniview.com

http://sgcdn.uniview.com

©2016 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

^{*}Product specifications and availability are subject to change without notice.