


W76322

Mini barriera ad infrarossi attivi 1,5 m. 5 raggi

Overview

The WINGUARD infrared mini-barriers are unobtrusive multiinfrared transmitter/receiver units housed in robust aluminium housings, which are one and two metres high respectively. With their 6 metre range, they are ideal for outdoor perimeter protection of windows and doors. The small dimensions of the the Tx and Rx units (only 23mm wide), makes them suitable for installation just on the outside of windows and doors. Both transmitter and receiver are supplied with approximately 2 metre screen cable to simplify installation. Winguard are fitted with 4 twin active infrared beams, Which are synchronized and controlled by a microprocessor. The alarm is activated when one of the beams is obscured by an object with at least a 10mm diameter for a duration of 90 milliseconds.

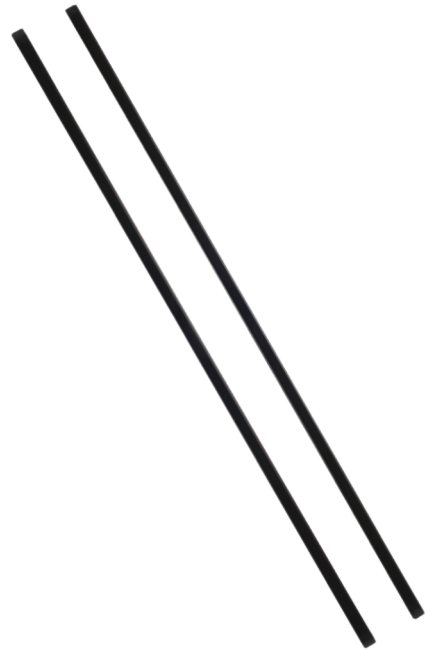

W76322

Mini barriera ad infrarossi attivi 1,5 m. 5 raggi

Specifiche tecniche

Generale

Categoria	Raggi ad infrarossi attivi
Tipo prodotto	Barriera Infrarossi Attivi
Sistema a infrarosso	four 7-twin active infrared beams

Rivelazione

Range	up to 6 m (height 1.5 m)
-------	--------------------------

Elettrico

Operating voltage	11.5 to 14.5 VDC
Consumo attuale	40 mA - 90 mA

Fisico

Dimensioni fisiche	1532 x 22 x 26 mm
Peso netto	1200 g
Colour	Nero

Ambientale

Temperatura operativa	-20 to 50°C
IP rating	IP55



In quanto azienda in continua innovazione, Carrier Fire & Security si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 5 May 2023 - 9:33