

DC128S60


Industrial flush mount contact, high security grade 3, white, 6m cable

Requirements for grade 3 magnetic contacts

The grade 3 magnetic contacts are high security contacts which do meet the following requirements: preciseness of opening distance, magnet polarisation, strength of the magnet

Model with built in EOL resistors available

Though built in EOL resistors are not mandatory according to EN50131-2.6 requirements, Interlogix offers a model with built in EOL resistors for a quick installation (see how to Order information)

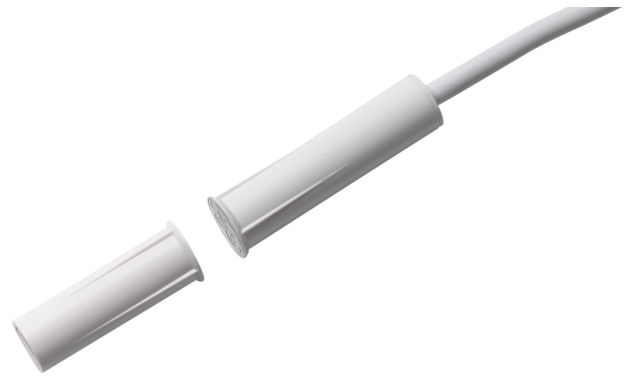

Dettagli

- EN 50131-2-6 Grade 3 and VDS certified
- 6m cable
- Tamper protected

DC128S60

Industrial flush mount contact, high security grade 3, white, 6m cable

Specifiche tecniche

Generale

| | |
|------------------|---|
| Application type | Montaggio ad incasso |
| Contact type | 1 pin NC contact |
| Connectivity | LIYY 4 x 0.14 mm Cu tin-plated; Suitable for LSA IDC method of terminatio |

Cablato / senza fili

| | |
|----------------|---------|
| Wired-wireless | Cablato |
| Operating gap | 15 mm |

Elettrico

| | |
|-----------------------|---|
| Tensione di esercizio | >250 V (breakdown voltage) max. 40 V (permissible operating voltage) |
| Voltage | max. 100 VDC |
| Potenza contatto | max. 6 W or 6 VA |
| Switching current | max. 500 mA |
| Resistenza contatto | max. 0.15 Ohm |

Fisico

| | |
|-----------------------------|--|
| Physical dimensions | Ø 3.2 mm x 6 m (cable dimensions) |
| Dimensions magnet | 6 x 30 mm AlNiCo5, axially polarized, in Ø 8 x 35 mm plastic sleeve with installation flange EF 8/20 |
| Dimensions contact / sensor | 8 x 32 mm |
| Colour | Bianco |
| Material | ABS |

Ambientale

| | |
|-----------------------|--|
| Operating temperature | -25 to 70°C |
| Environment | EN50130-5 ; Classe III - Da esterno (riparato) |
| IP rating | IP67 |

Regolatorio

| | |
|----------------|---------|
| Grado EN50131 | Grade 3 |
| Certificazioni | VdS |



In quanto azienda in continua innovazione, Carrier Fire & Security si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 5 May 2023 - 9:33