

DC108R4.7

Gate and roller shutter sensor with 4K7 end of line resistor

Overhead door magnetic contact

The DC108 series overhead door magnetic contact is for use in the rigorous environments of commercial and industrial installations. The floor mount units are constructed with a low profile heavy cast aluminium housing. The reed switch assembly is fully encased in an exclusive polyurethane potting material to prevent damage due to moisture or humidity.

Easy installation

A wide operating gap distance of up to 7.5 cm makes installation easy and helps prevent false alarms caused by door movement or damaged and loose fitting doors.



Dettagli

- Miniature, low-profile design
- Stainless steel armoured cable for added security, reliability
- Wide working gap for overhead doors
- Small size less likely to be damaged by forklifts
- Tamper loop provided

DC108R4.7

Gate and roller shutter sensor with 4K7 end of line resistor

Specifiche tecniche

Generale

Application type	Montaggio a superficie
Contact type	Resistenza 4K7
Connectivity	4 wires, 2 m (armoured cable)

Cablato / senza fili


Wired-wireless	Cablato
Operating gap	75 mm (max.)

Fisico

Dimensions magnet	89 x 39 x 39 mm
Dimensions contact / sensor	89 x 39 x 39 mm
Material	Alluminio

Regolatorio

Grado EN50131	Grado 2
---------------	---------

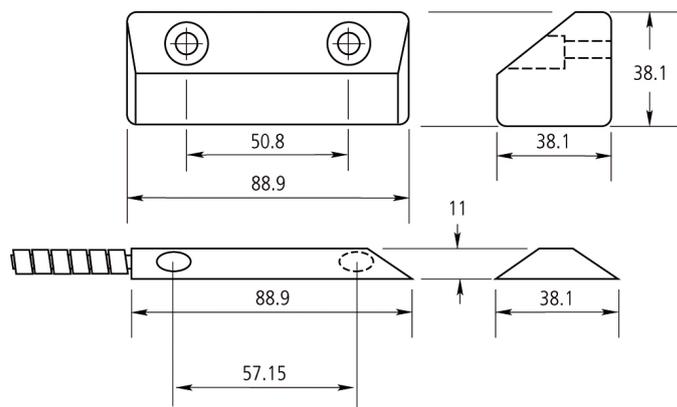

In quanto azienda in continua innovazione, Carrier Fire & Security si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 5 May 2023 - 9:33