


RP-H Dry Contact Relay

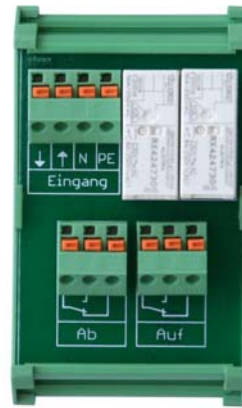

Product information:

The RP-H Dry Contact Relay is fitted with a change-over contact for "Up" and "Down". Control commands can thus be transferred to other systems.

Technical specifications:

Installation:	Series installation on DIN rail
Protection rating:	IP 20
Dimensions:	approx. 53 × 90 × 50 (W × H × D, mm), 3 width units
Weight:	approx. 80 g
Ambient temperature:	Operating -40...+50°C, Storage -55...+90°C
Ambient air humidity:	max. 95% rH, avoid condensation
Control input:	230 V AC (Up/Down/N/PE)
Outputs:	1 x up, dry contact, max. 230 V / 8 A 1 x down, dry contact, max. 230 V / 8 A

The product conforms with the provisions of EU directives.