

Datasheet

ELECTRO-MAGNETIC LOCKS/ BO600RH - Magnetic Architectural Horizontal Profile Housing


Product description

Pull handles are becoming increasingly popular with sites that require strong holding forces or more aesthetic solutions. The entire range from CDVI is ideal for locations where a stronger lock is essential; such as schools, halls of residence and other public buildings.

The BO600RH is an architectural profile housing with 2x300kg monitored magnets. The holding force is spread evenly to assure no door flexing.

The unit can be cut and RAL colour options are available.

 **PATENTED,
BREVETÉ**

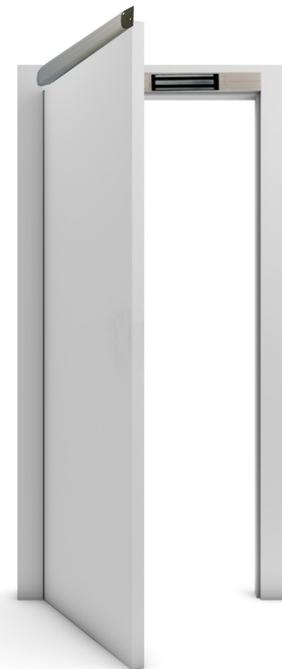

Key features

- Surface mount architectural handle
- Retrofit or new build
- Easy and quick installation
- Aesthetic profile
- Suitable for wood, metal & glass doors

 *Certification*

 *DEEE*

RoHS *Certification*

 *-20°C to 70°C*

All the information contained within this document (pictures, drawing, features, dimensions, specifications), could be perceptibly different and can be changed without prior notice. - March 2020 - CDVI_BO600RH_DS_01_EN_A4_C

Product Specifications

Holding force: 2 x 300kg

Electrical Specifications (per magnet)

Operating voltage: 12V to 24Vdc

Current: @12Vdc = 550mA,
@24Vdc = 275mA

