


# HL.KSI2MO- Selettore da incasso 2 micro NO

# HL.KSI2MO – Built-in key selector 2 micro NO

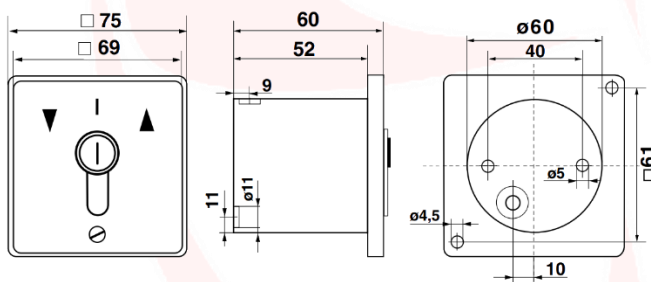

Caratteristiche tecniche	
Technical features	
Codice	HL-KSI2MO
Code	
Installazione	Da incasso
Installation	Wall embedded
Microinterruttori	2
Microswitches	
Tipo contatti microinterruttori	NO
Microswitches' contact type	
Portata max contatti	15 A
Contacts max output	
Grado di protezione	IP 54
Protection grade	
Temperatura di esercizio	-30° C ÷ +50° C
Operating temperature	

- Contenitore in pressofusione d'alluminio – Aluminium alloy
- Cilindro europeo – European cylinder
- Guarnizione interna per impermeabilità – Internal gasket for waterproof protection

## CERTIFICAZIONE CONFORMITÀ CE

**Codice prodotto:** HL.KSI2MO

*Il fabbricante dichiara che il prodotto in oggetto è conforme ai requisiti prefissati dalle normative CE, dalle normative VDE e alla classificazione IP e IK. È inoltre qualificato KEMA/KEUR che ne distingue il livello di sicurezza.*



## CE CONFORMITY CERTIFICATION

**Product code:** HL.KSI2MO

*The manufacturer declares that the product in question complies with the requirements set by the CE regulations, the VDE regulations and the IP and IK classification. It is also KEMA / KEUR qualified which distinguishes its safety level.*



**Domotime srl**

Via Monico, 9 25017 Lonato d/G (BS) – Italy

Tel: +39 030 9913901 Fax: +39 030 2070611

Skype: domotime email: [info@domotime.com](mailto:info@domotime.com) website: [www.domotime.com](http://www.domotime.com)