




Features:





>95%
Recognition accuracy

High performance camera application



Highlights:

Master/slave set-up.
No need for multiple white/black lists

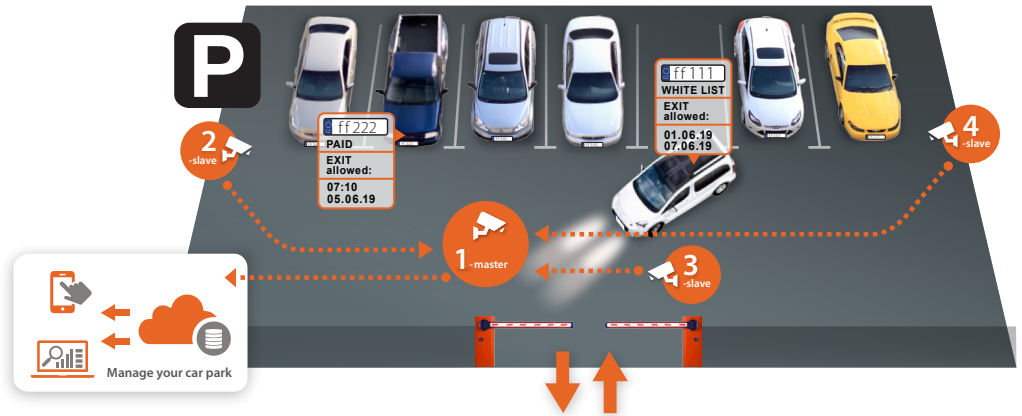

XNO-6080R/FSNP

2M Network IR Bullet Camera

Specifications

- Max. 2megapixel (1920 x 1080) resolution
- 2.8 ~ 12mm (4.3x) motorized varifocal lens
- Max. 60fps@all resolutions (H.265/H.264)
- H.265, H.264, MJPEG codec supported, Multiple streaming
- Day & Night (ICR), WDR (150dB), Defog
- Loitering, Directional detection, Fog detection, Audio detection, Digital auto tracking, Sound classification, Tampering
- Motion detection, Handover
- SD/SDHC/SDXC memory slot (Max. 512GB)
- Hallway view, WiseStream II support
- IR viewable length 50m, IP67/IP66, NEMA 4X, IK10
- IR LED Viewable length: up to 12 m at night for licence plate capture, max speed of 80km/h
- LDC support (Lens Distortion Correction)
- PoE / 24V AC, 12V DC, Bi-directional audio support



Dimensions

Unit:mm(inch)

