

IO956I

Modulo per 1 linea di avvisatori acustici completo di isolatore di linea.

General

The IO956I is an addressable sounder controller. It is designed to control sounders powered by an external DC supply. Sounders are switched continuously or pulsed, and may be synchronised.

Interfaces for intelligent systems

The IO956I is designed to suit individual applications. This standard interface is designed to be surface mounted to walls and consist of three parts: a back box with knockouts for cable entry, a PCB assembly and a protective front cover.


Interface with isolator

The IO956I is fitted with a bi-directional short-circuit isolator so that they are unaffected by a single short-circuit on either loop input or output.

Sounder Control

The IO956 is normally used to control a zone of sounders powered by an external DC supply. The sounders will be switched to sound continuously or be pulsed, 1s on, 1s off.

An opto-coupled input is provided to monitor the state of the external power supply.

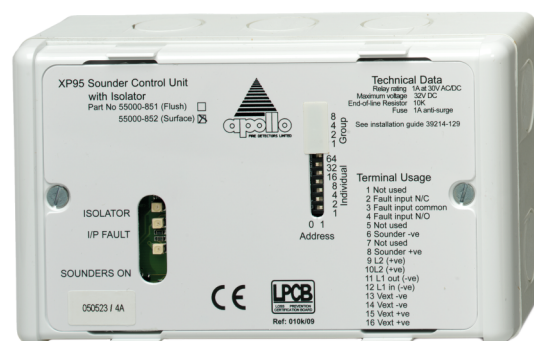

Dettagli

- LEDs for signalling of I/O and fault condition
- Aesthetically pleasing
- On board loop isolators
- Easy to install
- Well protected
- Modular design

|O956|

Modulo per 1 linea di avvisatori acustici completo di isolatore di linea.

Specifiche tecniche

Elettrico

Operating voltage	17 to 28 VDC
Current consumption	1.9 mA

Fisico

Colour	Bianco
--------	--------

Ambientale

Operating temperature	-20 to +70°C
Relative humidity	0 to 95% noncondensing
Environment	Interno
IP rating	IP54

Regolatorio

Certification	EN54-17, EN54-18
---------------	------------------

Supply voltage

17 - 28 VDC

Current consumption (Loop current)

Switch on surge (100 ms)	2.6 mA
Quiescent (with 10kOhm)	1.9 mA
Output active	1.7 mA
Fault	3.5 mA
Short circuit	4.5 mA

Current consumption (External supply)

Relay off	1 mA @ 9 VDC or 3 mA @ 32 VDC
Sounders ON (excluding sounder load)	44 mA @ 9 VDC or 47 mA @ 32 VDC

Sounder Voltage (max)

50 VDC

Sounder Current (max)

1 A @ 30 VDC

Supervision

9 - 11 VDC

Operating temperature

-20°C to +70°C

Relative humidity (non condensing)

0-95%

Ingress protection

IP54



In quanto azienda in continua innovazione, Carrier Fire & Security si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 22 May 2023 - 12:59