


ATS1483

ATS118x to Unsecure Mode

Product Overview

The ATS1483 ATS118x to Unsecure Mode configuration card allow to configure the ATS1180 or ATS1181 to ATS1160/61N Mifare reader mode (unsecure mode) without any programming device or menu configuration.

The configuration card has to be applied when the reader is not online.

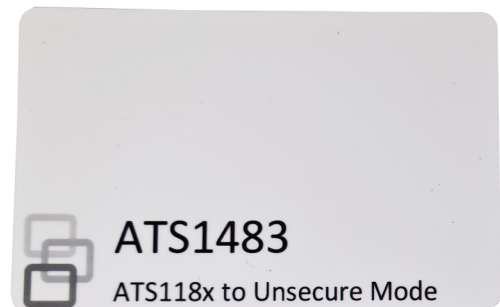

Dettagli

- When applied configures ATS1180/ATS1181 to ATS1160N/ATS1161N mode
- Apply when reader not online

ATS1483

ATS118x to Unsecure Mode

Specifiche tecniche

Sistema

Reading distance	min 1 cm
Custom data model	No
Supported readers	ATS ATS118x Secure Readers

Tecnologia

Credential type	Tessera di configurazione, Smart Card
Credential operating frequency	13.56 MHz

Stampa

Direct surface printing	Si
-------------------------	----

Informazioni sull'ordine

Minimum order quantity	1
Cards/tags in package	1

Fisico

Materiale	PVC
Form factor	CR80 (Credit)
Physical dimensions	86 x 54 mm
Colour	Bianco
Card Label	Programming Card



In quanto azienda in continua innovazione, Carrier Fire & Security si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 5 May 2023 - 10:33